



IDENTIFICATION

APPLICATIONS

- Automated warehousing
- Reading on forklift trucks
- Picking systems
- Automated shop floor

ADVANTAGES

- Extended reading range from 250 to 2000 mm thanks to the '2-step' mechanically adjustable focus system
- DIGITECH™ technology permits full software control over signal processing parameters. Scanner setup can therefore be optimized simply loading optimized software recipes, thus enabling excellent performance in all reading conditions
- ACR4™ reconstruction technology increases the maximum tilt angle and overall read rate on damaged barcodes
- Available with integrated software programmable Oscillating Mirror and built-in connectivity to Ethernet, Profibus and DeviceNet
- Easy and simple configuration thanks to Genius™ multi-language software tool

HIGHLIGHTS

- Good reading performance on very low contrast bar codes
- Focus adjustable optics
- Reading range from 250 to 2000mm
- ACR4™ reconstruction technology improves reading of damaged barcodes
- DIGITECH™ technology enables excellent reading performance
- Linear and integrated Oscillating Mirror versions
- Built-in connectivity to Ethernet / Profibus / DeviceNet
- Display and keyboard for scanner monitoring and diagnostics

GENERAL DESCRIPTION

DS6300 scanner is designed to offer a complete modular solution in terms of reading performance, built-in connectivity, ease of use and maintenance. With DS6300, Datalogic Automation provides mid-range industrial bar code readers with top class performance. DS6300 is therefore the optimal solution for a wide range of manufacturing applications both in the automated shop floor and in the automated warehousing.


DS6300 features a practical display with keyboard that increases the scanner's ease of use by showing barcode data read (local echo), statistics and diagnostic information. Moreover, it offers built-in connectivity to Ethernet, DeviceNet and Profibus networks.



READING DIAGRAMS

DS6300-100-0XX

Resolution: 0.20 mm/8 mils

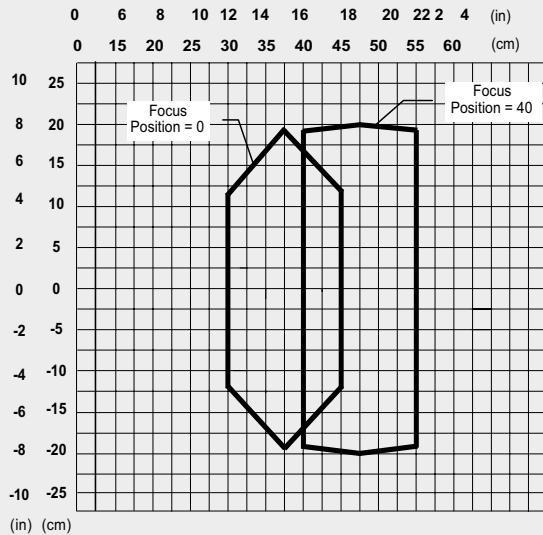

CONDITIONS

Code = Interleaved 2/5 or Code 39

PCS = 0.90


Pitch angle = 0°

Skew angle = 10° - 20°

Tilt angle = 0°

DS6300-100-0XX

Resolution: 0.30 mm/12 mils

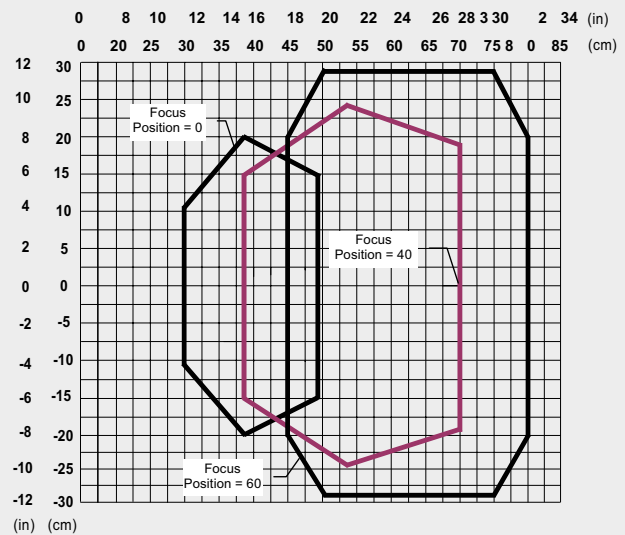

CONDITIONS

Code = Interleaved 2/5 or Code 39

PCS = 0.90


Pitch angle = 0°

Skew angle = 10° - 20°

Tilt angle = 0°

DS6300-100-0XX

Resolution: 0.38 mm/15 mils

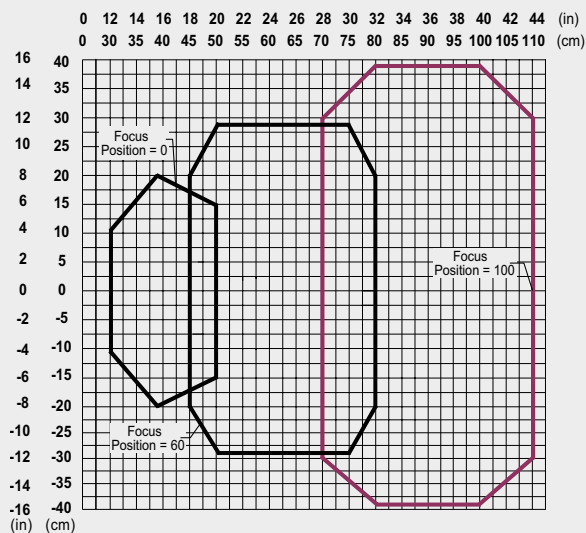

CONDITIONS

Code = Interleaved 2/5 or Code 39

PCS = 0.90


Pitch angle = 0°

Skew angle = 10° - 20°

Tilt angle = 0°

DS6300-100-0XX

Resolution: 0.50 mm/20 mils

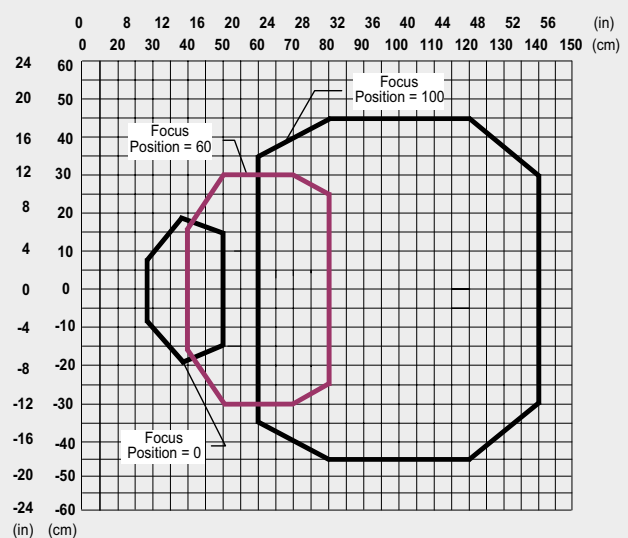

CONDITIONS

Code = Interleaved 2/5 or Code 39

PCS = 0.90


Pitch angle = 0°

Skew angle = 10° - 20°

Tilt angle = 0°


READING DIAGRAMS

DS6300-105-0XX (Oscillating Mirror)
Resolution: 0.20 mm/8 mils

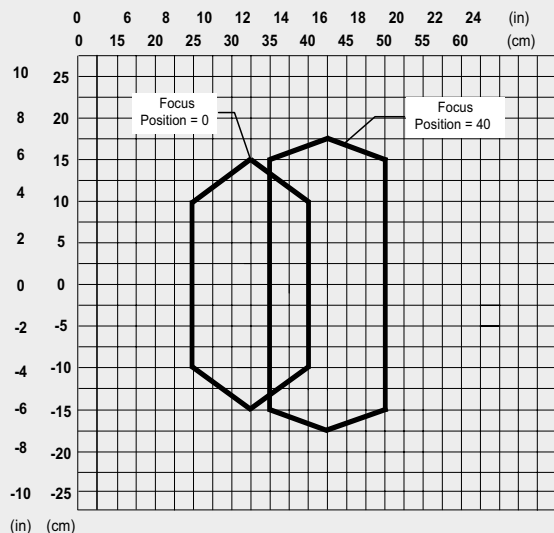**CONDITIONS**


Code = Interleaved 2/5 or Code 39
PCS = 0.90
Pitch angle = 0°
Skew angle = 10° - 20°
Tilt angle = 0

DS6300-105-0XX (Oscillating Mirror)
Resolution: 0.30 mm/12 mils

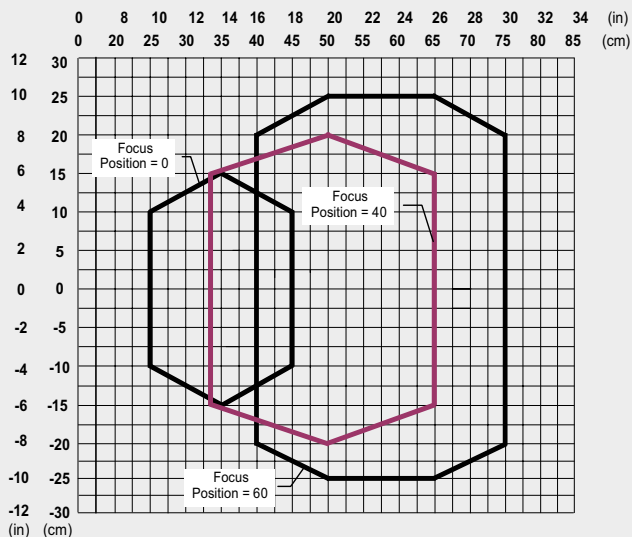**CONDITIONS**


Code = Interleaved 2/5 or Code 39
PCS = 0.90
Pitch angle = 0°
Skew angle = 10° - 20°
Tilt angle = 0°

DS6300-105-0XX (Oscillating Mirror)
Resolution: 0.38 mm/15 mils

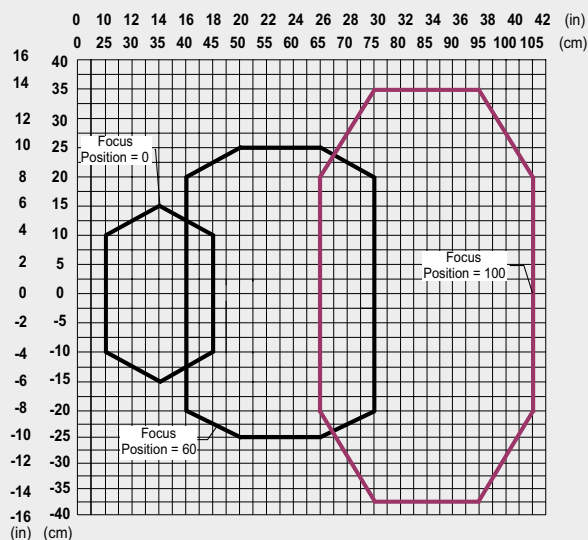**CONDITIONS**

Code = Interleaved 2/5 or Code 39
PCS = 0.90
Pitch angle = 0°
Skew angle = 10° - 20°
Tilt angle = 0°


DS6300-105-0XX (Oscillating Mirror)
Resolution: 0.50 mm/20 mils

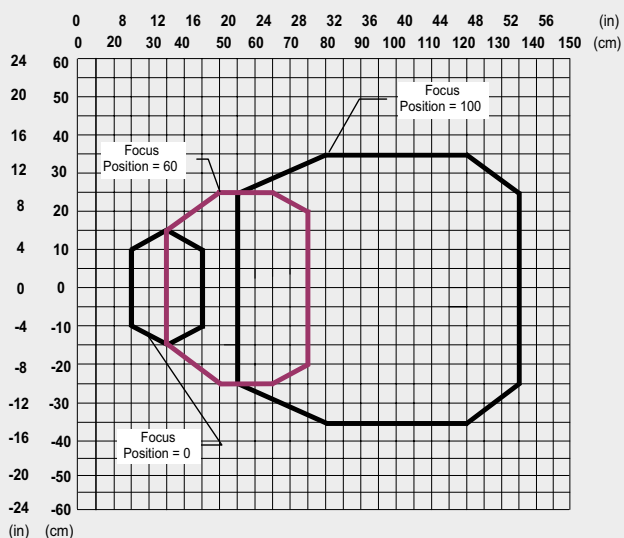**CONDITIONS**


Code = Interleaved 2/5 or Code 39
PCS = 0.90
Pitch angle = 0°
Skew angle = 10° - 20°
Tilt angle = 0°

DIMENSIONS

OSCILLATING MIRROR VERSION

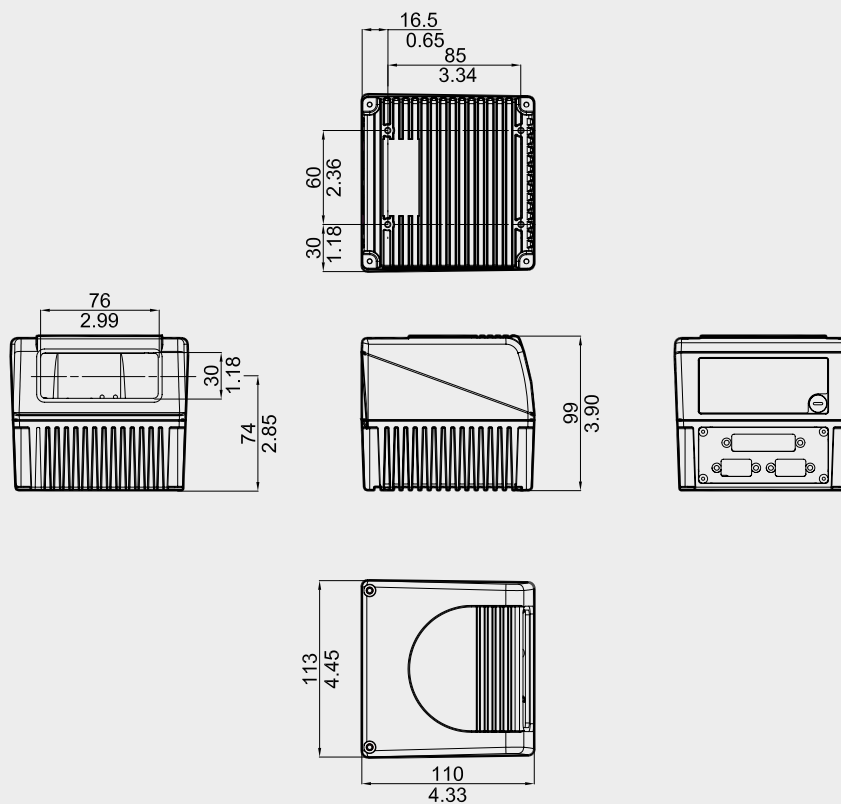

OSCILLATING MIRROR VERSION

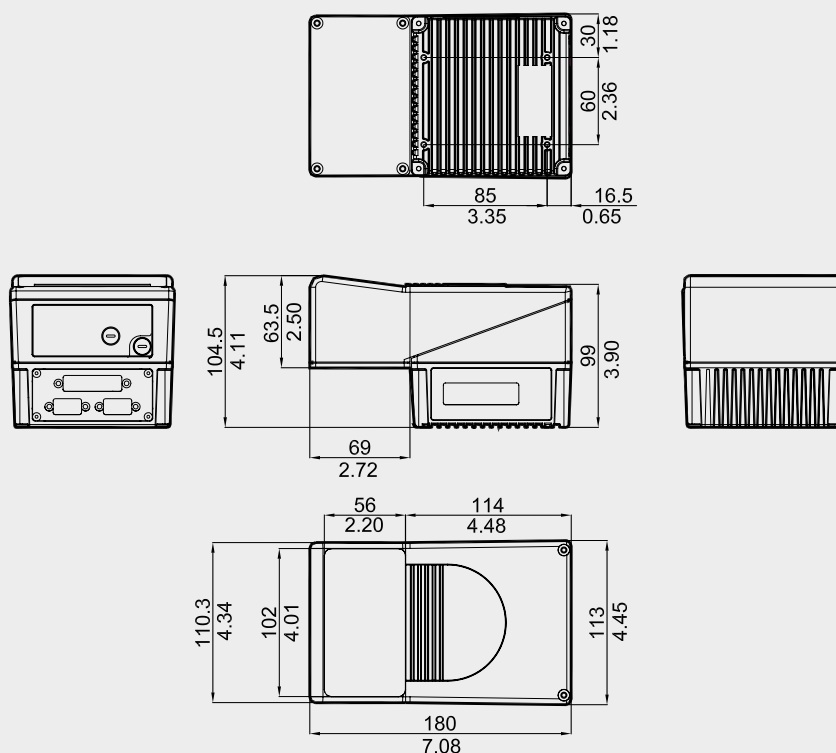


mm / inch

ELECTRICAL CONNECTIONS


All the connectors available for each DS6300 model are the following:

| SCANNER MODEL | CONNECTORS |
|---------------|---|
| Master/Slave | 25-pin male serial interface and I/O connector 9-pin male Lonworks connector* 9-pin female Lonworks connector |
| Ethernet | 26-pin male serial interface and I/O connector 9-pin female Lonworks connector RJ45 modular connector |

The DS6300 Master/Slave models are equipped with a 25-pin male D-sub connector for connection to the host computer, power supply and input/output signals. The DS6300 Ethernet models adopt a 26-pin male connector instead of the 25-pin one.



26-pin Connector




25-pin Connector

| 25-PIN D-SUB MALE CONNECTOR PINOUT | | | | |
|------------------------------------|---|---------|---|-------------------|
| Pin | Name | | Function | |
| 1 | CHASSIS | | Chassis - internally connected to GND Cable connected to chassis | |
| 20 | RXAUX | | Receive data of auxiliary RS232 (referred to GND) | |
| 21 | TXAUX | | Transmit data of auxiliary RS232 (referred to GND) | |
| 8 | OUT 1+ | | Configurable digital output 1 - positive pin | |
| 22 | OUT 1- | | Configurable digital output 1 - negative pin | |
| 11 | OUT 2+ | | Configurable digital output 2 - positive pin | |
| 12 | OUT 2- | | Configurable digital output 2 - negative pin | |
| 16 | OUT 3A | | Configurable digital output 3 - polarity insensitive | |
| 17 | OUT 3B | | Configurable digital output 3 - polarity insensitive | |
| 18 | EXT_TRIG/PS A | | External trigger (polarity insensitive) for PS | |
| 19 | EXT_TRIG/PS B | | External trigger (polarity insensitive) for PS | |
| 6 | IN 2/ENC A | | Input signal 2 (polarity insensitive) for Encoder | |
| 10 | IN 2/ENC B | | Input signal 2 (polarity insensitive) for Encoder | |
| 14 | IN 3A | | Input signal 3 (polarity insensitive) | |
| 15 | IN 4A | | Input signal 4 (polarity insensitive) | |
| 24 | IN_REF | | Common reference of IN3 and IN4 (polarity insensitive) | |
| 9,13 | VS | | Supply voltage - positive pin | |
| 23,25,26 | GND | | Supply voltage - negative pin | |
| Pin | RS232 | RS232 | RS485 Full-Duplex | RS485 Half-Duplex |
| 2 | Main Interface Signals (SW Selectable) | TX | TX485 + | RTX485 + |
| 3 | | RX | * RX485 + | |
| 4 | | RTS | TX485 - | RTX485 - |
| 5 | | CTS | * RX485 - | |
| 7 | | GND_ISO | GND_ISO | GND_ISO |


* Do not leave floating, see DS6300 Reference Manual for connection details.

ELECTRICAL CONNECTIONS



Female (all models)

9-pin Local Lonworks Connectors



Male (Master/Slave model)

9-pin Local Lonworks Connectors

9-PIN LONWORKS CONNECTOR PINOUT

| Pin | Name | Function |
|-----|-------------|---|
| 1 | CHASSIS | Cable shield internally connected by capacitor to chassis |
| 2 | GND | Supply voltage - positive pin |
| 6 | VS_I/O | Supply voltage - negative pin |
| 3 | REF_I/O | Supply voltage of I/O circuit |
| 4 | SYS_ENC_I/O | Reference voltage of I/O circuit |
| 5 | SYS_I/O | System signal |
| 7 | LON A | System signal |
| 8 | LON B | Lonworks line (polarity insensitive) |

In DS6300 Ethernet models a RJ45 Modular Jack is provided for Ethernet connection.
This interface and the connector pinout are IEEE 802.3 10 BaseT and IEEE 802.3u 100 BaseTX compliant.



RJ45 Modular Jack

RJ45 MODULAR JACK PINOUT

| Pin | Name | Function |
|---------|------|----------------------|
| 1 | TX + | Transmitted data (+) |
| 2 | TX - | Transmitted data (-) |
| 3 | RX + | Received data (+) |
| 6 | RX - | Received data (-) |
| 4,5,7,8 | NC | Not connected |

MODELS AND ACCESSORIES

| MODELS | |
|-------------|--|
| Order No. | Description |
| 931351010 | DS6300-100-010 ADJ FOCUS, LINEAR, M/S |
| 931351020 | DS6300-100-011 ADJ FOCUS, LINEAR, PROFIBUS |
| 931351030 | DS6300-100-012 ADJ FOCUS, LINEAR, ETHERNET |
| 931351040 | DS6300-100-015 ADJ FOCUS, LINEAR, DEVICENET |
| 931351060 | DS6300-105-010 ADJ FOCUS, OSC. MIRROR, M/S |
| 931351070 | DS6300-105-011 ADJ FOCUS, OSC. MIRROR, PROFIBUS |
| 931351080 | DS6300-105-012 ADJ FOCUS, OSC. MIRROR, ETHERNET |
| 931351090 | DS6300-105-015 ADJ FOCUS, OSC. MIRROR, DEVICENET |
| ACCESSORIES | |
| Order No. | Description |
| 93A201100 | GFC-60 90° MIRROR |
| 93A201102 | GFC-600 90° MIRROR CLOSE DISTANCE |
| 93ACC1730 | GFX-60 X-PATTERN MIRROR |
| 93ACC1721 | FBK-6000 FAST BRACKET KIT (2 PCS) |

TECHNICAL DATA

| | DS6300-100-01X | DS6300-105-01X |
|----------------------------|--|--|
| Dimensions | 110 x 113 x 99 mm (4.33 x 4.45 x 3.9 in) | 113 x 180 x 104.5 mm (4.45 x 7.08 x 4.11 in) |
| Weight | 1.5 kg. (3.3 lb) | 2.0 kg. (4.4 lb) |
| Case material | Aluminum | |
| Operating temperature | 0 to 40 °C (32 to 104 °F), | |
| Storage temperature | -20 to 70 °C (-4 to 158 °F) | |
| Humidity | 90% non condensing | |
| Vibration resistance | IEC 68-2-6 test FC 1.5mm; 10 to 55 Hz; 2 hours on each axis | |
| Shock resistance | IEC 68-2-27 test EA 30 G; 11 ms; 3 shocks on each axis | |
| Protection class | IP64 for standard models; IP65 on request | |
| Light source | Visible laser diode (630 to 680 nm) | |
| Scanning speed | 600 to 1200 scan/s SW programmable | |
| Resolution | Down to 0.20 mm (8 mils) | |
| Readable symbologies | Code 2/5, Code39, Code93, Code128, EAN/UPC, EAN128, Codabar, Pharmacode, ISBN128 | |
| Multilabel reading | Up to 10 different symbologies during the same reading phase | |
| Communication interfaces | Main Port: RS232/RS485 up to 115.2 Kbit/s | |
| | Auxiliary Port: RS232 up to 115.2 Kbit/s | |
| Other available interfaces | Lonworks (Master/Slave), Ethernet, Profibus, DeviceNet | |
| Digital inputs | Four SW programmable, optocoupled, NPN/PNP | |
| Digital outputs | Three SW programmable, optocoupled, event driven | |
| Display & keypad | LCD 16 x 2 characters & 3 keys | |
| Led indicators | Power On, Phase On, Data Tx | |
| Device programming | Windows™ based SW (Genius™) via serial or Ethernet link | |
| | Serial Host Mode Programming sequences | |
| Operating modes | 'On-line', 'Serial On-line', 'Automatic', 'Continuous', 'Test' | |
| Laser classification | Class 2 - EN60825-1; Class II - CDRH | |
| Laser control | Safety system to turn laser off in cases of motor slowdown or failure | |
| Power supply | 15 to 30 VDC | |
| Power consumption | 15 W typical, 20 W max | |